


JY-16 Timer Board

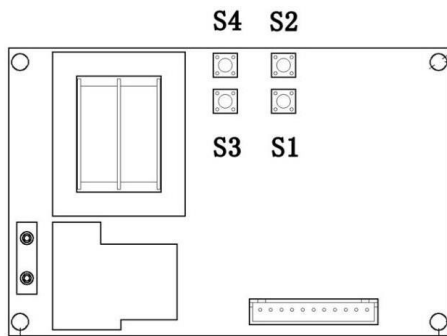

NOTE for Time Setting:

- **GIVEN TIME and PRICE**: User can get extra free time when the amount reach the value you have set up during the working time.
- **If the function of GIVEN TIME is not needed, please skip step 4-step 6 by pressing button S4.**

1. Please press button "S4", and then please use button "S1" and button "S2" to set up **PRICE**.
2. Please press button "S4", and then use button "S1" and "S2" to set up **TIME** for **FIRST 2 NUMBER (00:--)**
3. Please press button "S4", and then use button "S1" and "S2" to set up **TIME** for **LAST 2 NUMBER (--:00)**
4. Please press button "S4", and then use button "S1" and "S2" to set up **PRICE OF GIVEN TIME**.
5. Please press button "S4". Use button "S1" and "S2" to set up **GIVENTIME** for **FIRST2NUMBER (00:--)**
6. Please press button "S4". Use button "S1" and "S2" to set up **GIVENTIME** for **LAST2NUMBER. (- -:00)**
7. Please press button "S4". Use button "S1" and "S2" to set up **TIME** for **WARNING SOUND Default Is 30seconds.**

Mode Setting

1. Please hold on button "S1" and "S2" to get into **MODESETTING**.
2. Please use button "S1" and button "S2" to set up **CODE** for **FIRST MODE**.
3. Please press button "S4" after setting.
4. Please repeat step 2 and step 3 for setting rest mode.

Code Introduction

Operating Mode

01:01 – Time Counts down without pressing button

01:02 – Time Counts down by pressing button

Time Type

02:03 – Minute: Second

02:04 – Hour : Minute

Memory Mode

03:05 – Continue counting time after power off and on

03:06 – Reset time and value after power off and on

Time for Reset Automatically

04:??- 1-30 minutes are adjustable.

SOURCEWELL DEVICES PVT. LTD.

Formerly Known as EMAAR IMPEX PVT. LTD.

302/303, Diamond Plaza, Lamington Road,

Mumbai-400 004 INDIA

Tel.:+91-22-43 688 688

sales@sourcewell.in

www.sourcewell.in

JY-16 Timer Board

Description: Time and price will be reset automatically if user does not choose any function after the user insert coins.

Default

Operating Mode : 01:01

Time Type: 02:03

Memory Mode: 03:06

Time for RESET AUTOMATICALLY: non-functioned