


2" Kiosk Ticket Printer

KP-210H

1. Capacity: up to 250mm diameter(on printer)
2. 58mm kiosk/ticket printer module
3. Auto Feeding/easy-paper loading
4. Full or partial cutter
5. Near paper end detector
6. Take out paper sensor
7. large paper roll

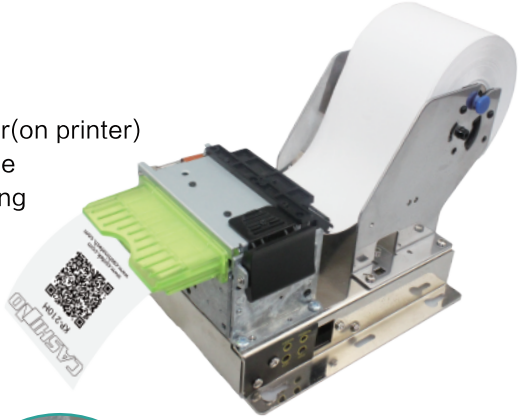

| | | |
|--------------------------|--------------------------|--|
| MODEL | | KP-210H |
| Print | print mode | Thermal line printing |
| | Printing speed | 250mm/s (max) |
| | Resolution | 203dpi |
| | Effective printing width | 54mm |
| Character | Character set | GBK(24x24); ASC II :9x17,9x24,16x18,12x24 |
| | Font | Font A(12x24):32; Font B(9x17):42; GBK:16 |
| Paper spec. | Paper Type | Thermal paper / Label paper |
| | Paper Diameter | 150mm(Max.) |
| | Paper Thickness | 55-200µm |
| | Paper Width | 25-60mm |
| | Roll Core Inner Diameter | 18mm(min) |
| Paper supply method | | Drop-in easy loading/ Automatic feed(straight in & out) |
| Reliability | TPH | 100km |
| | Cutter | 1,000,000 cuts or more |
| Detection | | No paper detection |
| | | Paper near end detection |
| | | Paper presence |
| | | Black mark detection |
| | | Label space detection |
| Barcode | 1D | EAN-13,EAN-8,CODE39,CODE93, CODE128,CODEBAR,ITF,UPC A,UPC-E |
| | 2D | QR CODE |
| Text and graphic support | | Figure,symbol,graph,curve, icon,multi-languages |
| Command | | Compatible with ESC/POS command set |
| Driver/SDK | | Windows Driver, Linux Driver, Android SDK |
| Interface | | RS232+USB/RS232+USB+Ethernet |
| Power | | 24VDC , 2A |
| Temperature | | Operating:-10°C~50°C |
| | | Storage:-20°C ~ 60°C |
| Humidity | | Operating:10%RH~80%RH |
| | | Storage:10%~90%RH |
| Profile Size | | 119(W)x141.5(D)x115(H)mm |