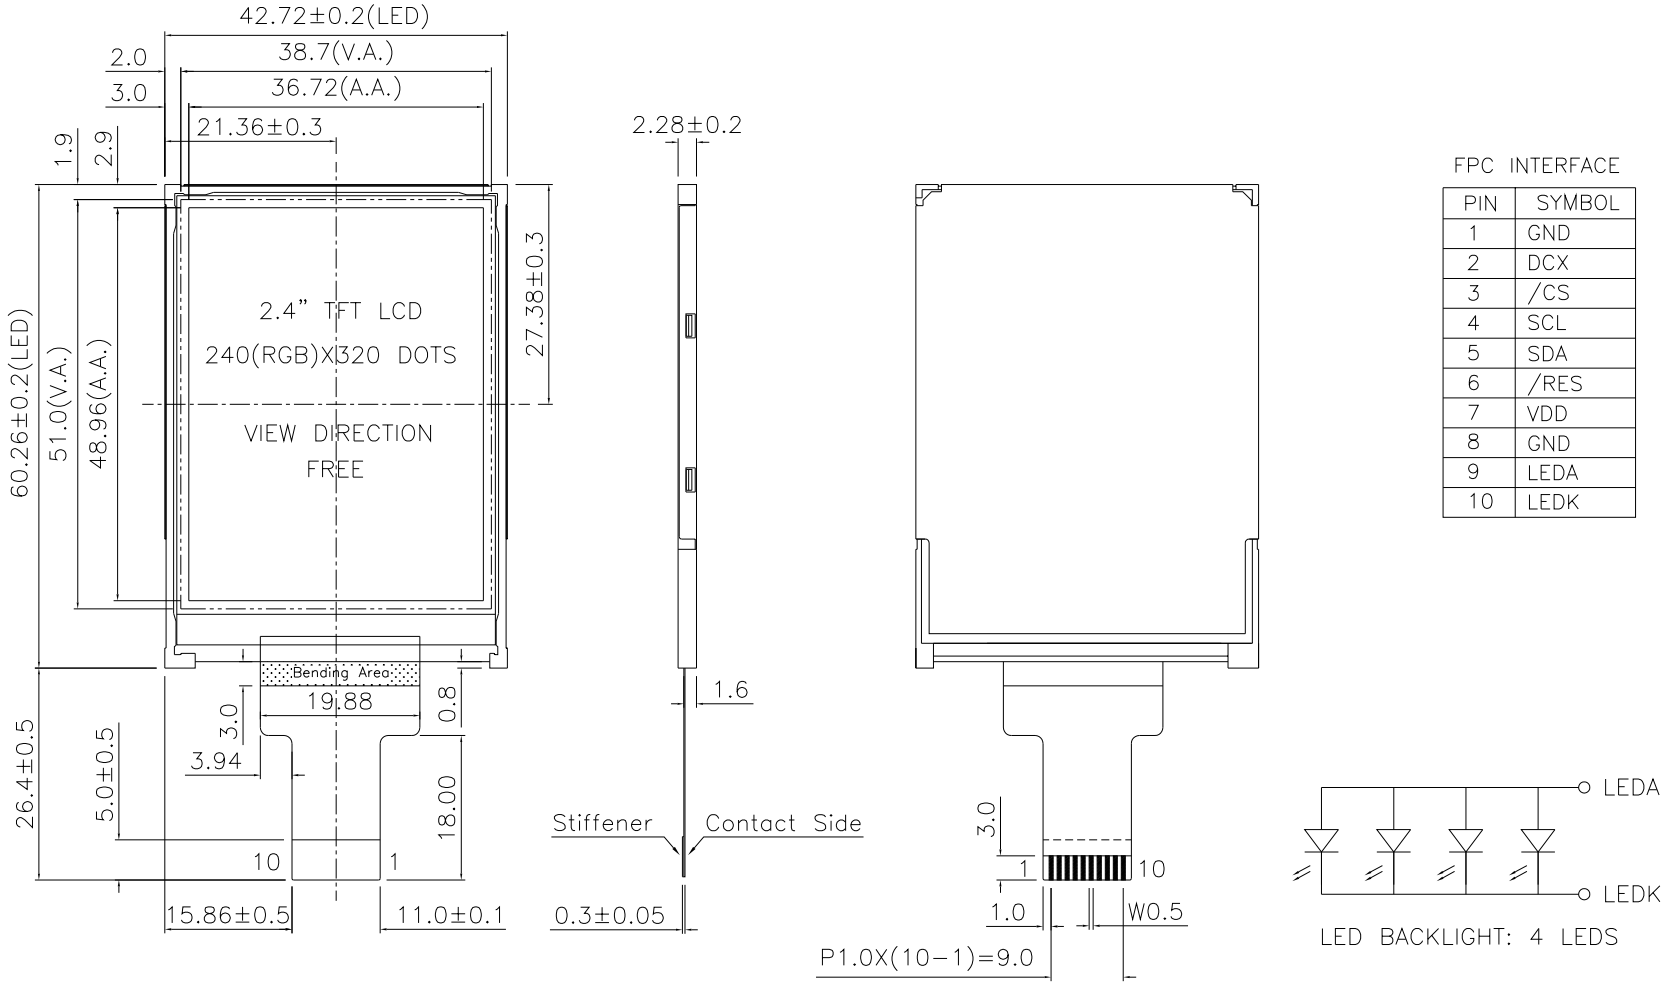

FPC INTERFACE

PIN	SYMBOL
1	GND
2	DCX
3	/CS
4	SCL
5	SDA
6	/RES
7	VDD
8	GND
9	LEDA
10	LEDK

LED BACKLIGHT: 4 LEDS

Notes:
1. 2.4" Transmissive, Normally-Black IPS TFT LCD
2. View Direction: Free
3. LCD Driver: ST7789P3
4. Interface: 4-Line SPI
5. Operation Temp.: -20°C to 70°C
6. Storage Temp.: -30°C to 80°C
7. VDD=2.4V to 3.3V, IDD=9.0mA(Typ.)
8. Brightness: 400cd/m2 (ILED=80mA,VLED=3.1V)



SCALE 50:1

LT024A-03B

DWN.	YDY	TITLE	LCM OUTLINE DIMENSION		
CHK.	LY	PART NO.	LT024A-03B		
APPD.	LY	DWG. NO.	--		
REV.	--	UNIT	mm	PROJECTION	
DATE	2024.09.05	SCALE	NTS	SHEET	1 OF 1